


07. OIL FILTERS

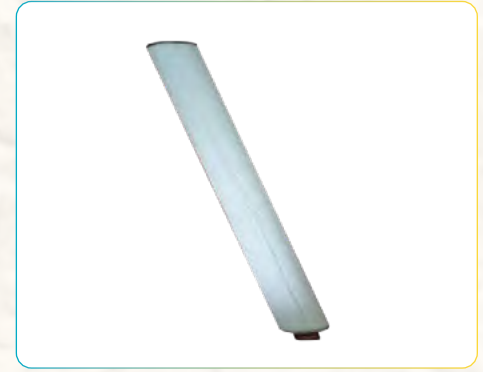

MATERIAL	203731
Description	FILTER ELEMENT, METHANOL/WATER, EXTENDED LIFE CONSTRUCTION WITH INTEGRAL END CAP AND SEALS. HIGH AREA FILTER PACK IN PLEATED DEPTH MEDIA. 2 MICRON, TOTAL LENGTH=12" 304.8 MM OUTSIDE DIAMETER = 6" 152,4 MM, INSIDE DIAMETER = 2.5" 63.5 MM
Purpose	To remove contamination and solid particles from gas-solid or liquid-solid process streams
Where used	Methanol Reflux pumps at Unit-3 Plant
Category of goods	PROCESS FILTERS

MATERIAL	43393
Description	FILTER, ELEMENT: 1 MICRON, LENGTH 46.1" (1,171 MM), OUTSIDE DIAMETER 3" (76 MM), INSIDE DIAMETER 1.67" (42.5 MM), LAMINAR FLOW MEDIA PACK WITH END CAPS WITH INTEGRAL SEAL AND DYNAMIC COMPRESSION FITTING
Purpose	To remove contamination and solid particles from gas-solid or liquid-solid process streams
Where used	Lean Amine Filter, Lean Amine Recycle at KPC Plant
Category of goods	PROCESS FILTERS



07. OIL FILTERS



MATERIAL	48792
Description	FILTER, ELEMENT: 5 MICRON, LENGTH 41.4" (1,052 MM), OUTSIDE DIAMETER 2.7" (69 MM), INSIDE DIAMETER 1.22" (31 MM), IF PROVIDED WITH SILICON O-RING INSTEAD BUNA O-RING. POLYPROPYLENE PERFORATED CASING
Purpose	To remove contamination and solid particles from gas-solid or liquid-solid process streams
Where used	Backwash Filter, Condensate Polishing at KPC Plant
Category of goods	PROCESS FILTERS

MATERIAL	110680
Description	FILTER, LIQUID: HIGH EFFICIENCY, KPO HYBRID, HIGH AREA. HIGH FLOW HYBRIDMEDIA PACK.POLY-ARMOUR ENCASEMENT CAGE AND CORE. (1 MICRON) TOTAL LENGTH 42" (1,069 MM) OUTSIDE DIAMETER 2.6" (66 MM) INSIDE DIAMETER 1.22" (31 MM)
Purpose	To remove contamination and solid particles from gas-solid or liquid-solid process streams
Where used	Cartridge Filter, Treated Water system at KPC Plant
Category of goods	PROCESS FILTERS

07. OIL FILTERS

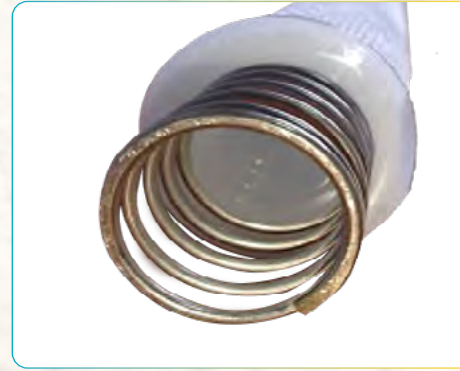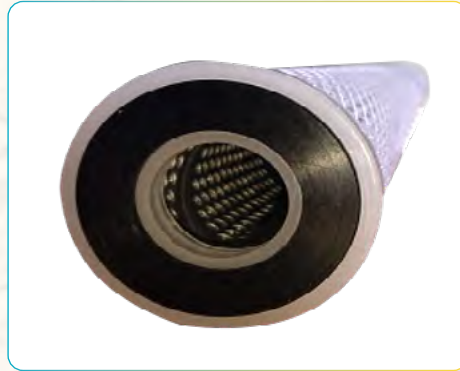

MATERIAL	239301
Description	FILTER ELEMENT: HIGH EFFICIENCY, PROCESS, HIGH AREA, LAMINAR FLOW MEDIA PACK WITH END CAPS WITH INTEGRAL SEAL AND DYNAMIC COMPRESSION FITTING. (10 MICRON), TOTAL LENGTH= 30.6" (777 MM), OUTSIDE DIAMETER = 2.48" (63 MM), INSIDE DIAMETER = 1" (26 MM).
Purpose	To remove contamination and solid particles from gas- solid or liquid-solid process streams
Where used	Glycol Filter, DRIZO dehydration at KPC Plant
Category of goods	Process Filters

MORE INFORMATION IS AVAILABLE AT:



For more information regarding Data Sheets
of goods and other requests, please contact at
OpenDayEvent@kpo.kz